


TECHNIKA

TOMORROW'S TECHNOLOGY TODAY

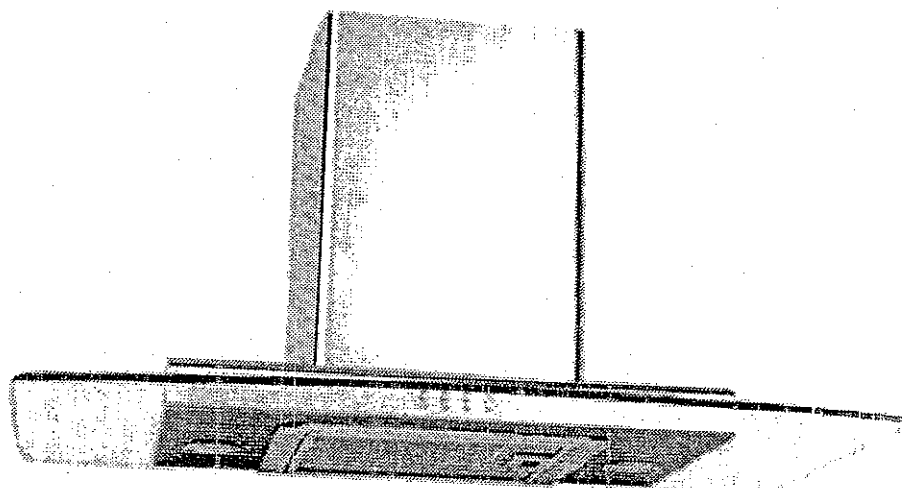

D10 900HA

DESIGNER RANGEHOOD

For the User

- Your Safety
- Description
- Instructions for use

For the Installer

- Safety information
- Troubleshooting

During Use

- This product is designed for domestic use only and should never be used for commercial applications. /BBQS.
- After using, always ensure that all controls are in the "OFF" position.
- When frying with a gas flame, take particular care not to allow the oil or grease in the pan to catch fire.

Cleaning, Maintenance & Service

- Clean grease filters often (at least once monthly). Heavy oil deposits are a fire hazard.
- Never attempt to repair this appliance by yourself. Always refer to qualified Service Technicians. (see number in booklet).
- Always switch off the electricity and unplug the connection before conducting maintenance or cleaning.

Electric Cord

- Ensure the supply cord is not exposed to heat, chemicals or sharp objects.
- If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.

Instructions for use

For the User

Hood Control Buttons

- Turns off the hood
- ↺ Low speed setting
- ↻ Medium speed setting
- ↻ High speed setting
- ☀ Turns the light on / off

Cleaning & Maintenance



Always switch off and unplug first !

- Wash with warm soapy water and a soft sponge. Never use abrasive detergent, scouring pads, steel wool or solvents on any part of the appliance as this will cause irreparable damage.
- **ALUMINIUM GREASE FILTERS:** Wash in the dishwasher or soak panel in a degreasing agent for an hour, then rinse off and dry before reinstalling.
- For this appliance to function effectively, regular maintenance is a must.
- Clogged filter restrict airflow and may cause the motor to overheat.

Your Safety

For the User



**PLEASE READ THIS SECTION
THOROUGHLY BEFORE
ATTEMPTING TO OPERATE THE
APPLIANCE !**

Installation

- This appliance must be installed by a qualified technician
- It is dangerous to modify any part of this appliance
- The manufacturer declines all responsibility in case of failure to adopt proper safety measures
- Ensure the location in which the appliance is installed has good, permanent ventilation
- In ducted mode, there must be one or more permanent air inlets
- The air collected must not be discharged into a duct used to blow off smoke from other appliances fed with electricity
- The distance between the bench top and the lower part of the hood must not be less than 65cm or higher than 75cm
- Use an electrical plug with earth that is correct for your location
- Check that the voltage in your area corresponds to the appliance

Child Safety

- Children and the infirm must be supervised by an adult at all times

Trouble Shooting

For the User

Symptoms	Possible Cause	Action
Unit not working	No Electrical Supply	• Check that the plug is connected • Check that the main switch is turned on
Poor airflow	Aluminium grease filters clogged	• Clean filters and replace when dry.
Motor running, but no airflow	Butterfly valve jammed	• Contact Technician
Motor cuts out after a few minutes	High Temperature safety device activated	• The Kitchen is not sufficiently ventilated
	The hood is installed too close to the cooktop	• The rangehood must be at least 65cm's from bench top
Oil dripping onto stove	Oil cup missing or not installed	• remove aluminium grease filters refit oil cup
	Aluminium grease filter saturated	• wash the aluminium grease filters
Whirring sound	Foreign object in contact with fan blade	• Contact Technician

Safety Information

**For the
Installer**

Connection to the Electrical Supply

- Electrical Connection must be made only in accordance to local standards and laws.
- Ensure that the Electrical Supply complies with the setting on this appliance, otherwise do not connect
- The electrical plug of this appliance must be earthed. If unsure, check with qualified technician. Colour Code:-

Green & Yellow= EARTH

Blue= NUETRAL

Brown= LIVE

- Ensure the power supply cord is free from any heat source or sharp objects.
- Replacement halogen bulbs must not exceed 20W.

Installation

- Use Suitable bolts & screws to mount the appliance on a secure surface.
- This until MUST be ducted, with the free duct work supplied in the box.
- The distance between the bench top and the lower part of the hood must not be less than 65cm or higher than 75cm.
- The location of the installation must have permanent openings for ventilation
- The discharge of air from the unit must meet local statutory regulations.

For Reliable service and parts ;

TECHNIKA

TOMORROW'S TECHNOLOGY TODAY

Customer Care Centre

Toll Free ; 1800 333 244

Phone ; 03) 97054144

Fax ; 03) 9704 1796

Email ; service@technika.com.au

8 – 10 Vesper Drive
Narre Warren Vic 3805